

TWK Series

Stainless Steel Sewage Submersible Pump

PRODUCT CATALOGUE



PRODUCT OVERVIEW


Reliable & Durable

Product Description

TWK is a stainless steel sewage submersible pump. It can be used to transfer clean water or sewage or other liquids similar to water in physical and chemical properties. It is equipped with stainless steel semi-open impeller. All wet parts are made of stainless steel.

Model Description

TWK m 150 A

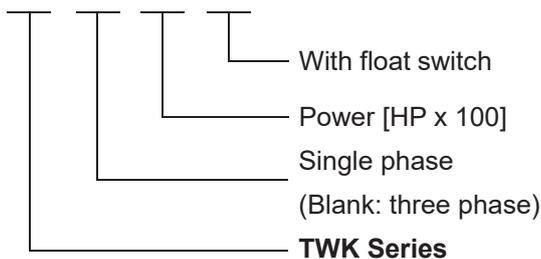

Applications


- Suitable for clean water, sewage.
- Farming, forestry fishery water supply.
- Gardening, Aquarium, Landscape waterfall.
- Drainage and filtration.

Pump

- Pump housing: Stainless steel
- Double shaft seal.
- Max. liquid temperature: 40°C
- Max. immersion depth: 5 m
- Max. diameter of particle: 0.55-1.0kW ≤ 30 mm
1.1-2.2kW ≤ 50 mm

Motor

- Insulation Class: F
- Protection Class: IP68
- Built-in thermal protector (for Single phase)

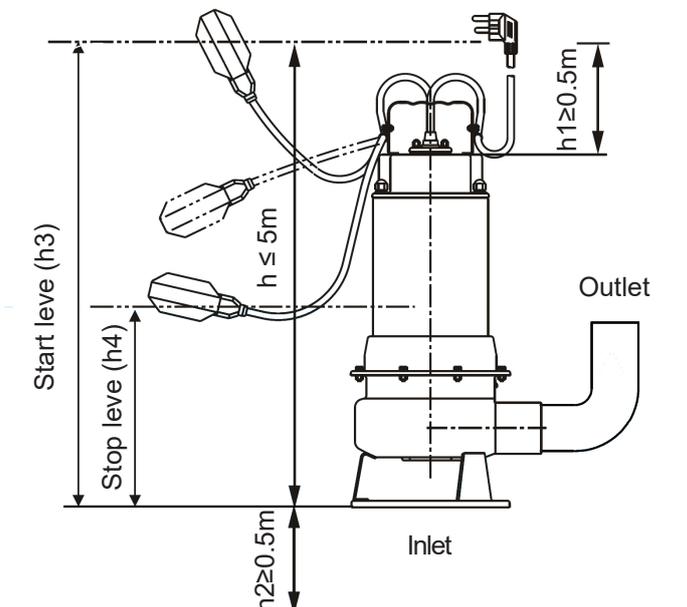


Model	h3	h4
TWK 75 A	480	230
TWK 100 A	495	230
TWK 130 A	510	230
TWK 150 A	535	260
TWK 200 A	555	260
TWK 300 A	585	270

PERFORMANCE RANGE

Technical Data

Performance Curves

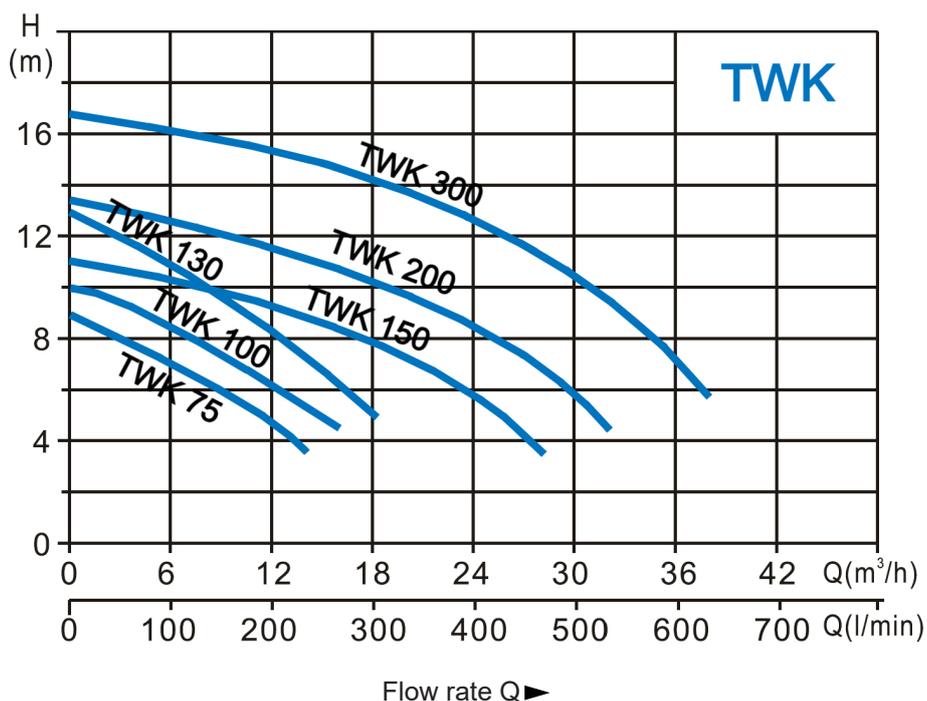

Technical Data

Model	Power (P2)		Q max [m³/h]	H max [m]	Outlet [inch]	G.W. [kg]	Package Dim [mm]
	[kW]	[HP]					
TWK 75 A	0.55	0.75	14	9	G 1½"	10.3	250x205X520
TWK 100 A	0.75	1.0	16	10	G 1½"	12	250x205X520
TWK 130 A	1.0	1.3	18	13	G 1½"	13.3	250x205X520
TWK 150 A	1.1	1.5	28	11	G 2"	16.2	270x225x565
TWK 200 A	1.5	2.0	32	13.5	G 2"	18.9	270x225x565
TWK 300 A	2.2	3.0	38	16.5	G 2"	19.8	270x225x565

TECNODYNE

TECNODYNE PUMPS INC.

02 Sheppard Ave E, North York
Ontario, Canada M2N 5Y7
T: +1 (647) 255-2270
info@tecnodyne.ca
www.tecnodyne.ca

TECNODYNE (China) Ltd.

Suite C, Level 7, World Trust Tower
50 Stanley Street, Central
Hong Kong
hk@tecnodynepumps.com
www.tecnodynepumps.com